

## CIEN3212G-4GF-8GT

### 12-Port Layer 2 Gigabit Din-Rail Industrial Ethernet Switch



- 4×1G fiber ports, 8×1G copper ports
- Support Jumbo frame transmission with a maximum frame size of 10,000 bytes
- Support high-level EMS protection
- Support 1×AC85~264V / DC110~370V or 2×DC12~60V redundant power inputs
- Aluminum alloy shell, IP40-rated housing protection
- -40°C to +75°C operating temperature range

### Product Description

The CIEN3212G-4GF-8GT is a 12-port Layer 2 gigabit unmanaged Din-rail industrial Ethernet switch, primarily designed for simple plug-and-play applications. The fiber ports support various SFP optical modules, enabling fiber-based long-distance transmission with strong resistance to electromagnetic interference. The copper ports support 10/100/1000M, full/half-duplex, and auto MDI/MDI-X, providing high-bandwidth, low-latency, and highly reliable network communication for industrial automation applications.

CIEN3212G-4GF-8GT features 4×1G fiber ports (SFP ports) and 8×1G copper ports, designed with reliable industrial-grade construction to withstand operating temperatures from -40°C to +75°C. It has passed rigorous functional, high/low temperature, safety, and electromagnetic interference tests, meeting the demands of various network environments and harsh industrial conditions. It is widely applicable in industrial automation, integrated energy, smart cities, intelligent transportation, smart factories, and other fields.

## Features and Benefits

- Support 4×Gigabit fiber ports and 8×Gigabit copper ports
- Optical modules support single-mode/multi-mode, single-fiber/dual-fiber, and selectable transmission distances, with strong resistance to electromagnetic interference, and a maximum transmission distance of up to 80 km
- Copper ports support 10/100/1000 Mbps, full/half-duplex, MDI/MDIX auto-negotiation, plug-and-play functionality, and convenient, quick setup
- Support Jumbo frame transmission with a maximum frame length of 10,000 bytes
- Support system power failure with relay alarm
- Support high-level EMS protection ensures normal and stable operation in complex electromagnetic environments, unaffected by external electromagnetic interference
- Support 1×AC85~264V / DC110~370V AC/DC power input, or 2×DC12~60V power inputs optional, with dual power supply redundancy
- Aluminum alloy housing, efficient heat dissipation, IP40 protection rating
- Operating temperature range: -40°C to +75°C

## Specifications

Protocol Standards	
IEEE Standards	IEEE 802.3, IEEE 802.3u, IEEE 802.3ab, IEEE 802.3z
Switch Capability	
Processing Type	Store-and-Forward
Backplane Bandwidth	56Gbps
Buffer Size	4.1Mbit
Jumbo frame	10000Byte

MAC Table Size	8K
<b>Interface</b>	
1G Fiber Port	4×1000Base-X Gigabit SFP ports, not compatible with 100Base-FX, can be customized to 4×100M fiber ports
1G Copper Port	8×10/100/1000Base-T(X) auto-sensing RJ45 copper port, full/half-duplex, auto MDI/MDI-X
Relay	1×relay alarm output, 3-pin 3.81mm terminal block with lock
Status LED	Power indicator, fiber port indicator, copper port speed and connection/activity indicator
<b>Power Supply</b>	
Power Input	DC model: DC12~60V, supports dual power supply redundancy, non-polarity AC model: AC85~264V/ DC110~370V
Power Consumption	DC Model: ≤10.2W@DC24V (full load) AC Model: ≤10.6W@AC220V (full load)
Connection	DC model: 5-pin 5.08mm terminal block with lock AC model: 3-pin 5.08mm terminal block with lock
<b>Physical Characteristics</b>	
Dimensions	140×54×110mm (excluding DIN rail & connectors)
Installations	Easy installation on 35mm DIN rails
Enclosure Protection	Aluminum alloy housing, IP40 protection rating
Weight	About 0.67 kg (DC), about 0.76 kg (AC)
<b>Working Environment</b>	


Operating Temp	-40°C ~+75°C
Storage Temp	-40°C ~+85°C
Relative Humidity	5%~95% (non-condensing)
<b>Industry Standard</b>	
EMS	<p>IEC 61000-4-2 (ESD): Level 4 (Contact discharge <math>\pm 8\text{kV}</math>, Air discharge <math>\pm 15\text{kV}</math>)</p> <p>IEC 61000-4-5 (Surge): Level 3 (Power supply: Common mode <math>\pm 2\text{kV}</math>, Differential mode <math>\pm 2\text{kV}</math>;</p> <p>Ethernet port: Common mode <math>\pm 6\text{kV}</math>, Differential mode <math>\pm 2\text{kV}</math>)</p> <p>IEC 61000-4-4 (EFT): Level 3 (Power supply: <math>\pm 2\text{kV}</math>; Ethernet port: <math>\pm 2\text{kV}</math>)</p>

## Dimensions

Unit: mm

CIEN3212G-4GF-8GT

CIEN3212G-4GF-8GT-AD220

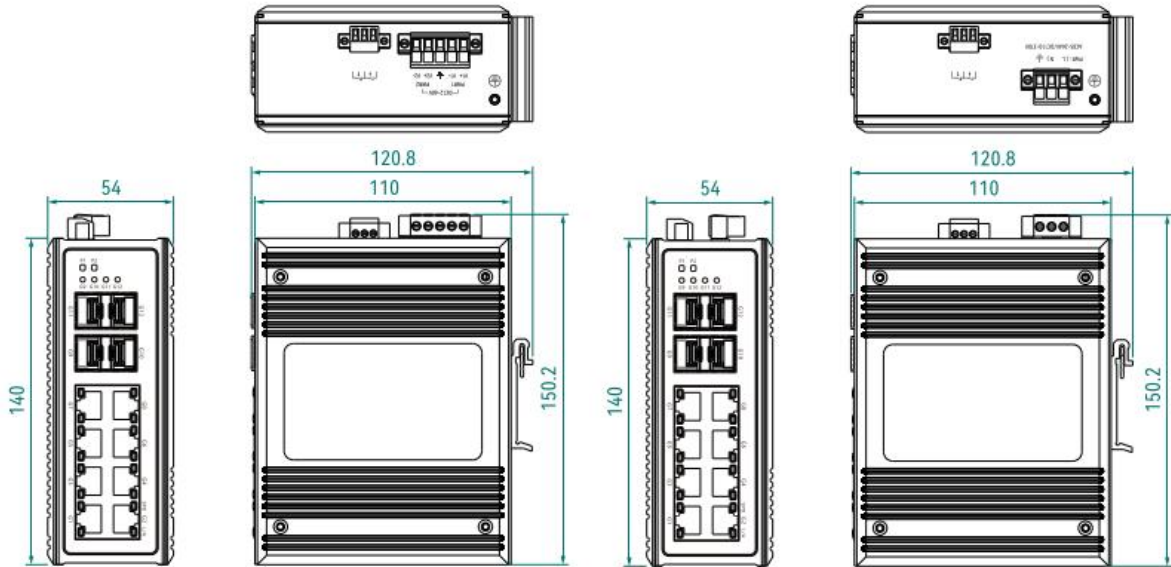

## Ordering Information

Standard Model	1G Fiber Port	1G Copper Port	Input Voltage
CIEN3212G-4GF-8GT	4	8	Dual DC12~60V
CIEN3212G-4GF-8GT -AD220	4	8	Single AC 85~264 V / DC 110~370 V



## Contact Us

### COME-STAR COMMUNICATION(WUHAN) CO., LTD.

Address: Puneng Industrial Park, Fenghuang Garden 1st Road, East Lake High-Tech Development Zone, Wuhan, China.

Tel: +86-027-59257958

Mail: [sales@come-star.com](mailto:sales@come-star.com)

Official site: [www.come-star.com](http://www.come-star.com)

Copyright © Come-Star All rights reserve