

CISCOM7206G-2GF-4GT

6-port Layer 2 Full Gigabit Managed DIN Rail Industrial Switch



- 2×Gigabit SFP ports, 4×10/100/1000Base-T(X) ports (RJ45 connector)
- Support MW-Ring v1/v2, STP/RSTP, and other ring redundancy protocols
- Fast ring redundancy less than 20ms (MW-Ring v1/v2)
- Support single AC85~264V/DC110/370V power supply or dual DC 9~60V power input optional
- With IP40 high-strength aluminum alloy shell and fanless design
- -40°C to +85°C working temperature

Product Description

CISCOM7206G-2GF-4GT series is layer 2 Gigabit managed DIN rail industrial Ethernet switch. It supports 2×Gigabit SFP ports and 4×10/100/1000Base-T(X) ports, utilizing a store-and-forward mechanism with robust bandwidth processing capabilities. This switch automatically detects packet errors, reducing transmission failures, and effortlessly supports Gigabit networking, ensuring stable, reliable, and efficient data transmission. The product is built with industrial-grade components and adheres to high-quality system design and production controls. It features a standard 35mm DIN rail mount, high-strength aluminum alloy housing for durability, fanless heat dissipation, and operates in a wide temperature range from -40°C to +85°C. With its high-standard industrial protection design, it can adapt to various harsh working environments, delivering stable communication performance.

CISCOM7206G-2GF-4GT series supports WEB management functions and various network protocols such as MW-Ringv1/v2, STP/RSTP, VLAN, QoS, static aggregation, port mirroring, static multicast MAC address binding, network diagnostics, relay alarms, and online system upgrades. These features enhance network performance, reliability, and security, meeting the demands of complex networks. The product undergoes rigorous testing, including functional, high and low-temperature, safety, and EMC tests, making it suitable for complex network and harsh industrial environment applications. It can be widely applied in fields such as comprehensive energy, smart cities, rail transportation, intelligent traffic, smart factories, and industrial automation.

Product Features

- Support rate limiting for broadcast, multicast, and unknown unicast packets at both inbound and outbound ports
- Support rate limiting for unknown unicast, unknown multicast, known multicast, and broadcast packets to suppress network storms
- Support Quality of Service (QoS) to prioritize voice, video, and critical data transmission on network devices, addressing network congestion
- Support 802.1Q VLAN, offering Access, Trunk, and Hybrid interfaces for easy segmentation of multiple broadcast domains, enhancing network security
- Support static multicast MAC address binding to reduce multicast broadcast in the network, saving network resources
- Support relay alarm methods, including port link status and ring network status alerts
- Support port mirroring to capture data at both inbound and outbound ports for network diagnostics and fault management
- Support link aggregation to increase transmission bandwidth and enhance link reliability
- Support Rapid Spanning Tree Protocol (RSTP) and compatible with Spanning Tree Protocol (STP) to eliminate network loops and improve network reliability
- Support port statistics for counting different types of transmitted and received data frames, enabling monitoring of port traffic
- Support ping to check network connectivity
- Support user management with different levels of access for guests and administrators
- Support device online restart, factory reset, and system upgrades

Technical Specifications


| Software | |
|----------------------------|---|
| Switching | <p>Support port configuration, rate configuration, storm suppression, port aggregation, and port statistics</p> <p>Support port VLAN and 802.1Q VLAN</p> <p>Support MAC address aging</p> |
| Redundancy | <p>Support MW-Ringv1/v2 private ring network technology</p> <p>Support RSTP (Rapid Spanning Tree Protocol) and compatible with STP (Spanning Tree Protocol)</p> |
| Multicast | <p>Supports static multicast MAC address binding</p> |
| Management and Maintenance | <p>Support static IP configuration</p> <p>Provide Quality of Service (QoS) with support for 802.1P, DSCP (Differentiated Services Code Point), and port priority mapping, allowing for absolute and relative priority control.</p> <p>Support port mirroring, Ping, and relay alarms.</p> <p>Offer user management with different levels of access, online restart, factory reset, system upgrades, and configuration file upload/download.</p> <p>Support MW-View management</p> |
| Switch Capability | |
| Processing Type | Store-and-Forward |
| Backplane Bandwidth | 14Gbps |
| Buffer Size | 2Mbit |
| MAC Table Size | 2K |
| Interface | |
| 1G Fiber Port | 2x1000Base-X Gigabit SFP ports |
| 1G Copper Port | 4x10/100/1000Base-T(X) auto-sensing RJ45 ports, support full/half duplex and auto MDI/MDI-X |
| Relay | 1 relay alarm output with 3-pin 3.81mm pitch locking terminal blocks |

| | |
|---------------------------------|--|
| CONSOLE | 1 CONSOLE port with a RJ45 connector, supporting RS232 signal for device debugging and command configuration |
| Status LED | Power indicator, operation indicator, Alarm indicator, Interface indicator, and Ethernet port speed indicator |
| Power Supply | |
| Input Voltage | DC model: Dual DC9~60V power input, non-polarity AC model: Single AC85~264V/DC110~370V power supply |
| Power Consumption | <5.5W@DC24V(full load) |
| Connection | 5.08mm pitch 5-pin terminal block |
| Physical Characteristics | |
| Dimensions | 140×54×110 mm (DIN rail mounting clip excluded) |
| Installations | Easy installation on 35mm DIN rails |
| IP Code | IP40 |
| Weight | 0.58kg(DC model), 0.67kg(AC model) |
| Working Environment | |
| Operating Temp | -40°C~+85°C |
| Storage Temp | -40°C~+85°C |
| Relative Humidity | 5%~95% (non-condensing) |
| Industry Standard | |
| EMC | IEC 61000-4-2 (ESD): Level 4 IEC 61000-4-5 (Surge): Level 4 ※Ethernet port supports 6kV lightning protection IEC 61000-4-4 (EFT): Level 4 |
| Certification | CE, FCC, RoHS |


Dimensions

Unit: mm

CISCOM7206G-2GF-4GT

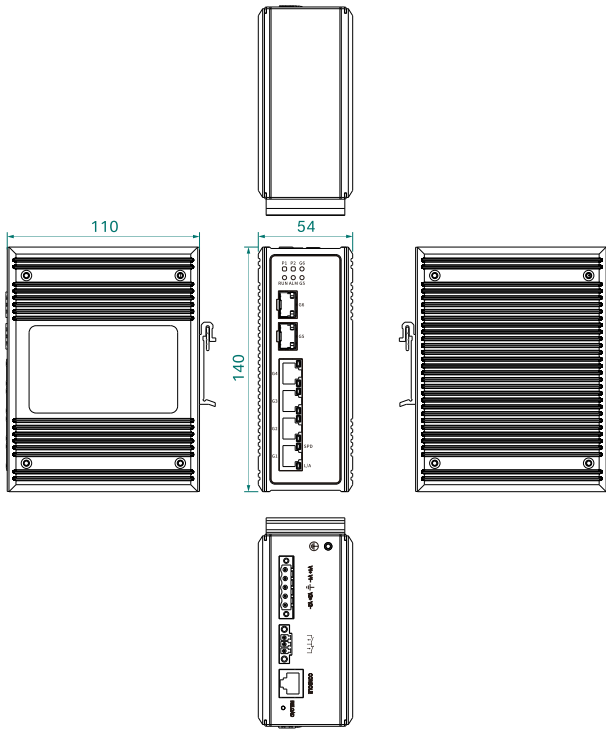

CISCOM7206G-2GF-4GT-AD220

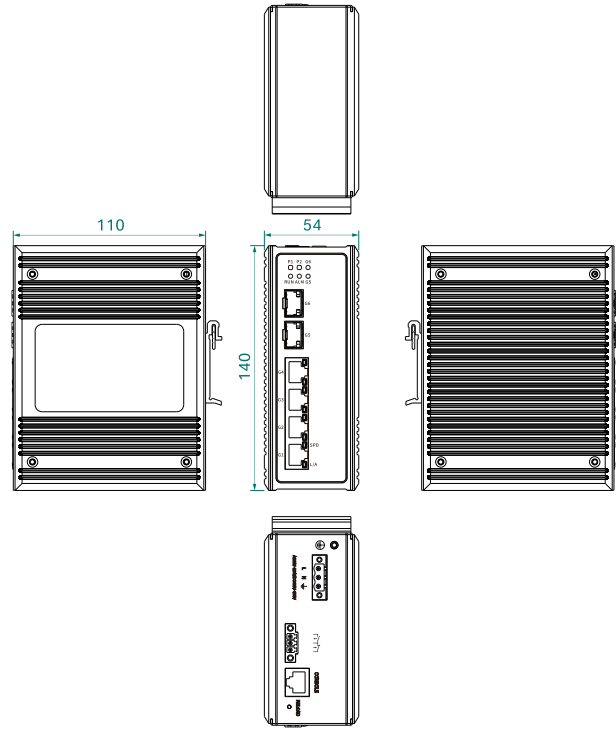

Ordering Information

| Standard Model | 1G Fiber Port | 1G Copper Port | Input Voltage |
|---------------------------|------------------|-------------------|--|
| CISCOM7206G-2GF-4GT | 2 | 4 | Dual DC9~60V power input |
| CISCOM7206G-2GF-4GT-AD220 | 2 | 4 | Single AC85~264V/DC110~370V power supply |



Contact Us

COME-STAR COMMUNICATION(WUHAN) CO., LTD.

Address: Puneng Industrial Park, Fenghuang Garden 1st Road, East Lake High-Tech Development Zone, Wuhan, China.

Tel: +86-027-59257958

Mail: info@come-star.com

Official site: www.come-star.com

Copyright © Come-Star All rights reserved